


T11

Toroidal LPG tanks for multivalves

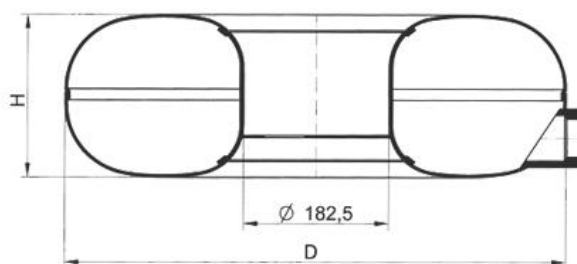

APPLICATION:

Liquid gas propane-butane mixture storage for admission of petrol engines in passenger cars, commercial and delivery vehicles.

STANDARD TANK:

1. Manufactured according to UN ECE 67R.01
2. Colour satin black RAL 9005

TECHNICAL DATA:

Class 1
 Design and test pressure: 3000 kPa
 Working pressure: max. 2000 kPa

OPTIONS:

1. Different colour

HOW TO ORDER:

T Diameter Capacity Version

I.E. T52002211

DIMENSIONS:

Part number	Diameter D [mm]	Capacity V [l]	Mass [kg]	Height H [mm]
T52002211	520	22	18	145
T52003611	520	36	22,5	225
T56503411	565	34	22	180
T58004011	580	40	23	200
T58004611	580	46	25	225
T60003911	600	39	21,5	190
T60004211	600	42	22	200
T60004711	600	47	23,5	220
T60004911	600	49	24	230

STAKO sp.j.
 Poznańska 54
 76-200 Słupsk
 Poland

tel.: +48 59 8424895
 fax: +48 59 8481999

stako@stako.pl
 www.stako.pl



T60005411	600	54	25	250
T60005911	600	59	26	270
T63004311	630	43	24	190
T63004711	630	47	25	204
T63005311	630	53	26	225
T63006011	630	60	27	250
T63006511	630	65	30	270
T65005011	650	50	28	200
T65005511	650	55	30	220
T65006111	650	61	32	240
T65007011	650	70	34	270
T72007311	720	73	38	230
T72007711	720	77	39	240
T72008011	720	80	40	250

STAKO sp.j.
Poznańska 54
76-200 Słupsk
Poland

tel.: +48 59 8424895
fax: +48 59 8481999

stako@stako.pl
www.stako.pl

